


变更经历  
Modification Career

变更编号 NO:	变更内容 Modification	修改 Modified By	批准 Approved By	日期 Date

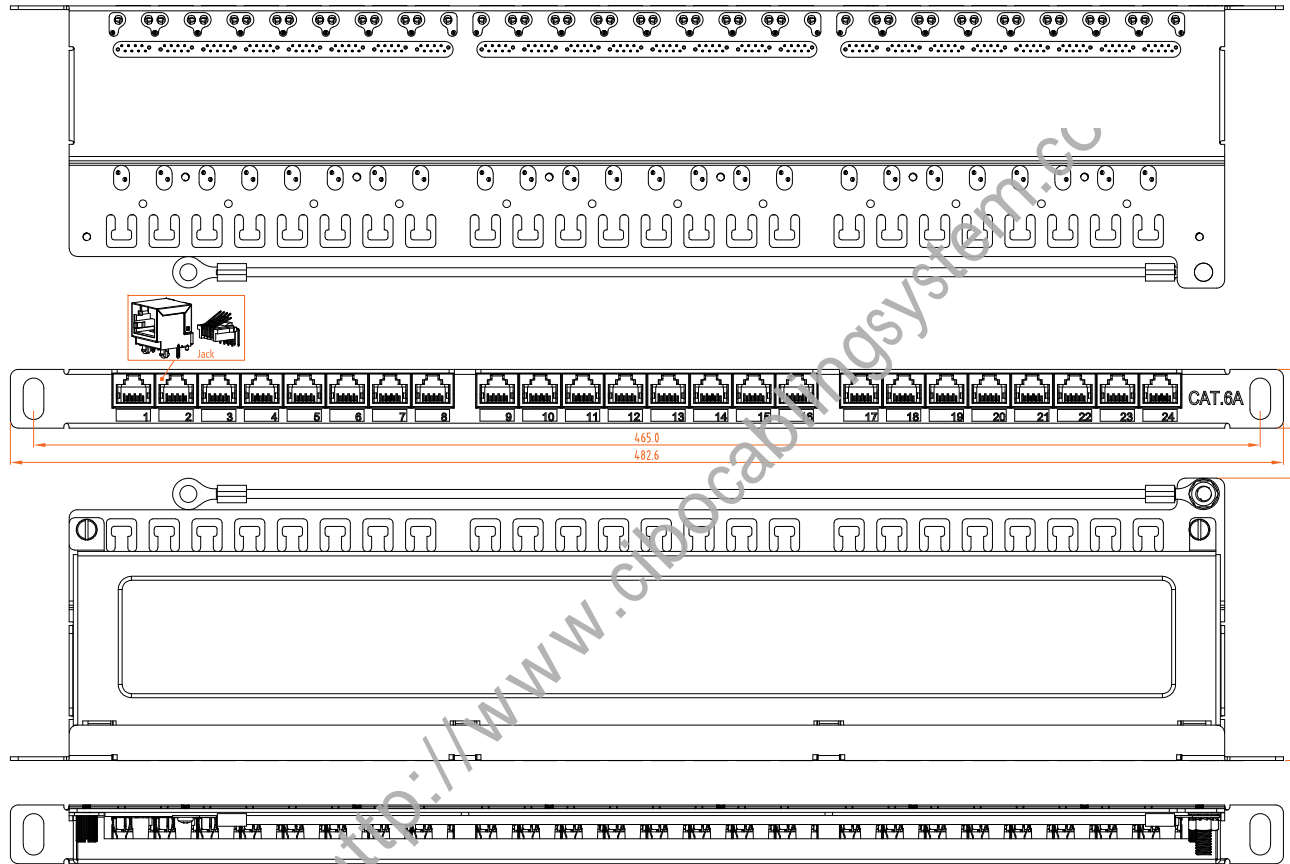

NOTES:

- ELECTRICAL:**  
 1. VOLTAGE RATING : 125 VAC RMS  
 2. CURRENT RATING : 1.5 AMP  
 3. CONTACT RESISTANCE : 100 MILLIOHMS MAX  
 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC  
 5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz, 1MIN  
 6. C6 PERMANENT LINK : CONFORM TO ANS1/TIA/EIA-568 B.2-1
- ENVIRONMENTAL:**  
 1. STORAGE : -40° TO +85°  
 2. OPERATION : 0° TO 70°  
 RJ45 JACKS COMPLY TO REQUIREMENTS OF IEC-60603-7-1  
 MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

- MECHANICAL:**  
 1.FRONT & COVER PANEL MATERIAL: Cold-rolled steel, SPCC,T=1.6mm,with Nickel plating,  
 2.HOUSING MATERIAL : PBT+15%GF UL94V-0  
 3.CONTACT MATERIAL : PHOSPHOR BRONZE PLATING GOLD  
 4.BACK PANEL FRAME : SPCC spraying plastics  
 5.IDOC MATERIAL : PC UL94V-0 TERMINAL:PHOSPHOR BRONZE,TIN PLATING  
 6.RJ45 JACK LIFE : 750 TIMES MIN  
 7.IDOC LIFE : 200 TIMES MIN  
 8.WIRE : AWG 22-24  
 9.TIA Cat.6A Perm. Link Test: Worst pair NEXT margin≥2.0dB  
 10.Retentiveness of insertion structure: 50N 60±5s

 <b>宁波思柏通信科技有限公司</b> Ningbo Cibo Communication Technology Co.,Ltd.				客户 Client		未注公差 Tolerances except as noted 0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20 100.00- Angle ±1°
				重量 Weight		
材料 Material						
部件名称 Part	部件编号 Part NO.	单位 Unit	mm	产品型号 Product NO:		
设计 Designed by	审核 Verified by	核准 Approved by	版本 REV	产品名称 Product		
			比例 Scale			
			页次 Page	0.5U 24 Ports Shielded Patch Panel		
					First angle projection	
						

